


Current Transducer LA 100-P

For the electronic measurement of currents : DC, AC, pulsed..., with a galvanic isolation between the primary circuit (high power) and the secondary circuit (electronic circuit).

$$I_{PN} = 100 \text{ A}$$



16019



Electrical data

I_{PN}	Primary nominal r.m.s. current	100				A
I_P	Primary current, measuring range	0 .. ± 150				A
R_M	Measuring resistance @	$T_A = 70^{\circ}\text{C}$		$T_A = 85^{\circ}\text{C}$		
		$R_{M \min}$	$R_{M \max}$	$R_{M \min}$	$R_{M \max}$	
	with $\pm 12 \text{ V}$	@ $\pm 100 \text{ A}_{\max}$	0 50	0 42	Ω	
		@ $\pm 120 \text{ A}_{\max}$	0 22	0 14	Ω	
	with $\pm 15 \text{ V}$	@ $\pm 100 \text{ A}_{\max}$	0 110	20 102	Ω	
		@ $\pm 150 \text{ A}_{\max}$	0 33	20 25	Ω	
I_{SN}	Secondary nominal r.m.s. current	50				mA
K_N	Conversion ratio	1 : 2000				
V_C	Supply voltage ($\pm 5 \%$)	$\pm 12 \dots 15$				V
I_C	Current consumption	$10 (@ \pm 15 \text{ V}) + I_S$				mA
V_d	R.m.s. voltage for AC isolation test, 50 Hz, 1 mn	2.5				kV

Accuracy - Dynamic performance data

X	Accuracy @ I_{PN} , $T_A = 25^\circ\text{C}$	@ $\pm 15 \text{ V} (\pm 5 \%)$	± 0.45	%
		@ $\pm 12 \dots 15 \text{ V} (\pm 5 \%)$	± 0.70	%
e_L	Linearity		< 0.15	%
I_O	Offset current @ $I_P = 0$, $T_A = 25^\circ\text{C}$	Typ	Max	mA
I_{OM}	Residual current ¹⁾ @ $I_P = 0$, after an overload of $3 \times I_{PN}$		± 0.15	mA
I_{OT}	Thermal drift of I_O	- $25^\circ\text{C} \dots + 85^\circ\text{C}$	± 0.05	± 0.25 mA
		- $40^\circ\text{C} \dots - 25^\circ\text{C}$	± 0.10	± 0.50 mA
t_{ra}	Reaction time @ 10 % of I_{PN}		< 500	ns
t_r	Response time ²⁾ @ 90 % of I_{PN}		< 1	μs
di/dt	di/dt accurately followed		> 200	A/ μs
f	Frequency bandwidth (-1 dB)		DC .. 200	kHz

General data

T_A	Ambient operating temperature	- 40 .. + 85	$^\circ\text{C}$
T_S	Ambient storage temperature	- 50 .. + 95	$^\circ\text{C}$
R_S	Secondary coil resistance @	$T_A = 70^\circ\text{C}$	120 Ω
		$T_A = 85^\circ\text{C}$	128 Ω
m	Mass	18	g
	Standards ³⁾	EN 50178 : 1997	

Notes : ¹⁾ The result of the coercive field of the magnetic circuit

²⁾ With a di/dt of 100 A/ μs

³⁾ A list of corresponding tests is available.

Features

- Closed loop (compensated) current transducer using the Hall effect
- Printed circuit board mounting
- Insulated plastic case recognized according to UL 94-V0.


Advantages

- Excellent accuracy
- Very good linearity
- Low temperature drift
- Optimized response time
- Wide frequency bandwidth
- No insertion losses
- High immunity to external interference
- Current overload capability.

Applications

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications.

Dimensions LA 100-P (in mm. 1 mm = 0.0394 inch)

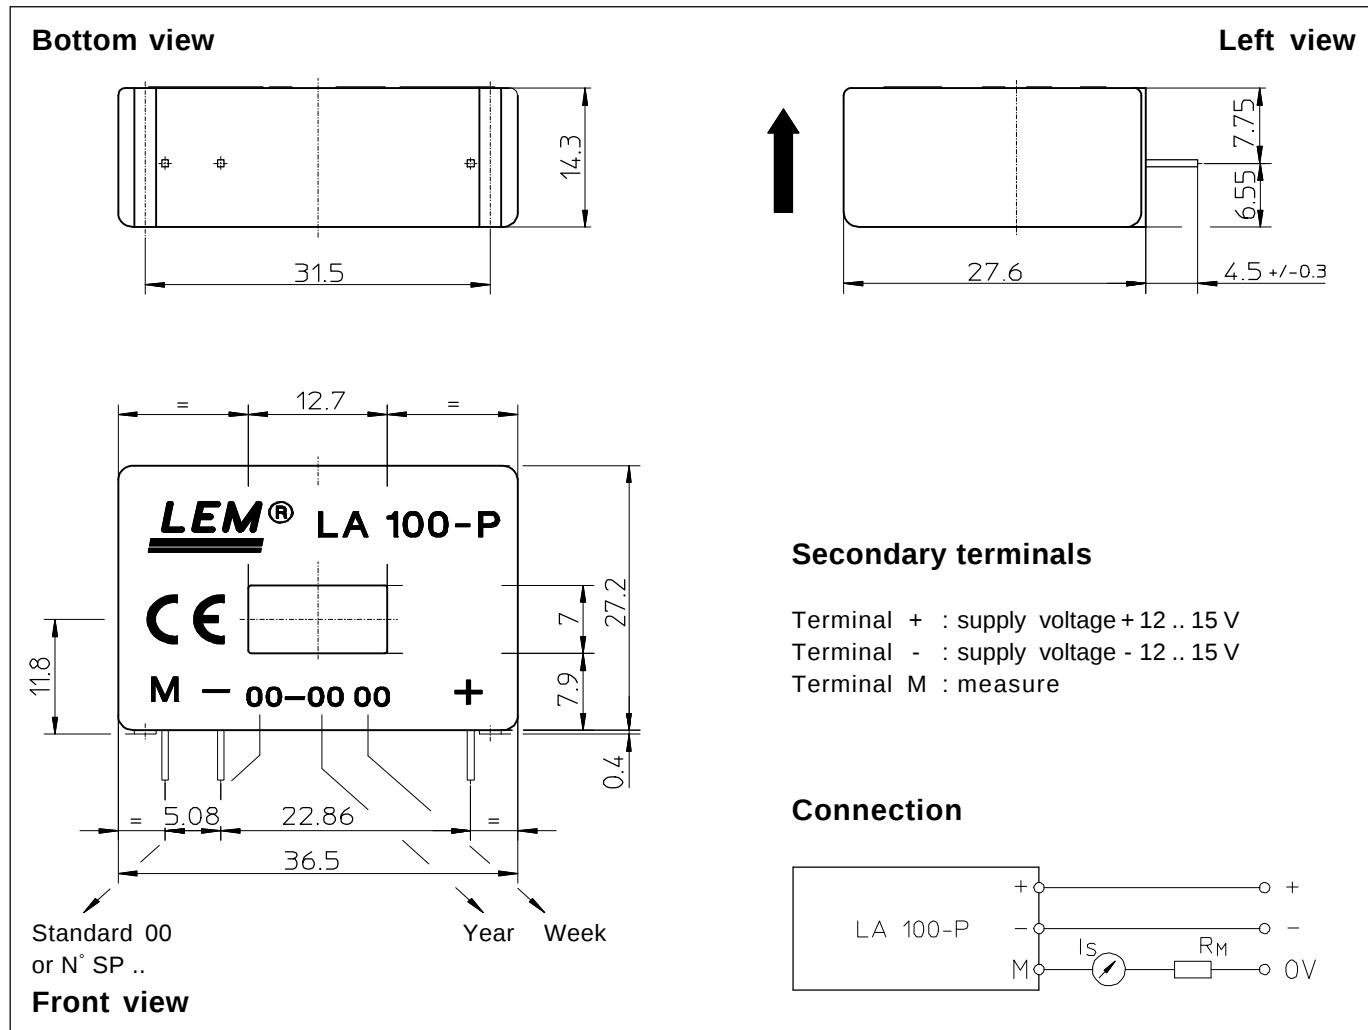

Mechanical characteristics

- General tolerance ± 0.2 mm
- Primary through-hole 12.7 x 7 mm
- Fastening & connection of secondary 3 pins
- Recommended PCB hole 0.63 x 0.56 mm
- Recommended PCB hole 0.9 mm

Remarks

- I_s is positive when I_p flows in the direction of the arrow.
- Temperature of the primary conductor should not exceed 100°C.
- Dynamic performances (di/dt and response time) are best with a single bar completely filling the primary hole.
- In order to achieve the best magnetic coupling, the primary windings have to be wound over the top edge of the device.
- This is a standard model. For different versions (supply voltages, turns ratios, unidirectional measurements...), please contact us.