



ДИСКОН

ООО "Дискон"

Адрес: г. Донецк, ул. Умова, д. 1

Тел./факс: 8 (062) 385-49-09, 385-48-68



www.discon.com.ua

E-mail: discon@discon.com.ua



TL78 Series

- Compact size
- Light weight
- High sensitivity
- Non-contact, isolated measurement
- Five different case sizes
- Frequency 50 – 400Hz
- Ideal for electric shock prevention earth leakage breakers and short circuit relays

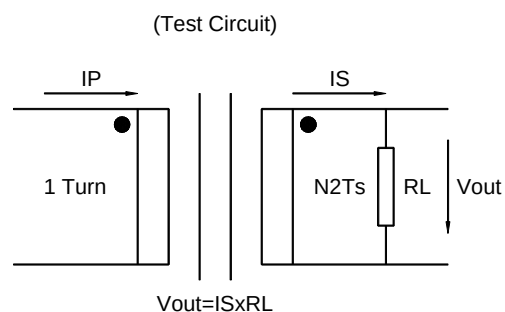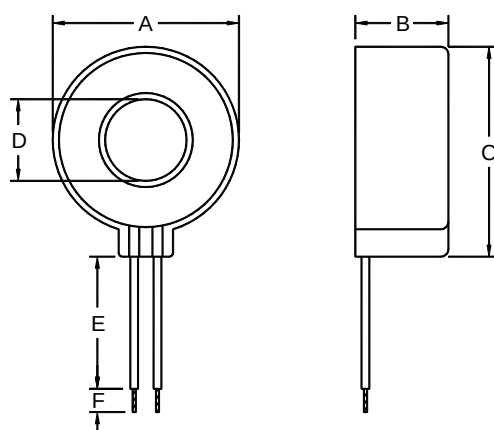

Product Series	Dimension (mm)					
	A	B	C	D	E	F
TL78-1	18.7	7	21.2	6.7	65	5.0
TL78-2	22	8	25	7.6	65	5.0
TL78-3	24	12	27	10.2	65	5.0
TL78-4	30	11	33	15.0	65	5.0
TL78-5	48	19.3	51.5	19.0	65	5.0
Tolerance (mm)	max.	max.	max.	min.	± 2	± 1

Part No	Rated Current (Arms)	Output Voltage (mV) min.	Overload Characteristics (%) max.	Temperature Characteristics (%) max.	Measurement Conditions
TL78-1-001	30	8	10	±10	$I_o=11.25 \text{ mA}$ $R_L=1.0\text{k}\Omega$
TL78-2-001	30	8	10	±10	$I_o=11.25 \text{ mA}$ $R_L=1.0\text{k}\Omega$
TL78-3-001	60	8	10	±10	$I_o=22.50 \text{ mA}$ $R_L=0.3\text{k}\Omega$
TL78-4-001	125	8	10	±10	$I_o=22.50 \text{ mA}$ $R_L=0.3\text{k}\Omega$
TL78-5-001	200	8	10	±10	$I_o=22.50 \text{ mA}$ $R_L=0.3\text{k}\Omega$