

厦门赛特勒磁电有限公司/ Xiamen Zettler Magnetics Co., Ltd.

中国厦门市湖里大道48-50号银丰工业大厦7楼(7/F, Yin Feng Building, No.48-50 Hui Road, Huli District, Xiamen, China, 361006)

电话 (TEL) : +86 592 2650988

传真 (FAX) : +86 592 2650900

承认书/ Specification for approval

客户名称/ Customer: _____

产品类型/Description: _____ Transformer

产品品名/ZETTLER p/n _____ AHI05016

客户名/Customer p/n: _____

版本标识/ Revision: _____ A0

页码标识/Page No. : _____ page 1 of 3

编制日期/Draft date : _____ 2012-7-31

编制/Drafted	审核/Checked	批准/Approved
Linda	David	Yehua

客户承认/Approved by Customer : _____

友情提示:请在签字确认后,按封面的传真号码回传给赛特勒磁电有限公司.如无回传,则视为默认,后续的相关订单将以按本承认书的规定为技术要求.

Friendly Reminder: Please help to sign this Spec when approve , and fax to ZETTLERmagnetics .
Or else, we will consider you have accepted it and make future order based on this Spec.



版本/Rev.	日期/Date	变更内容描述/Description	承认/Approved

承认书 / SPECIFICATIONS FOR APPROVAL

CUSTOMER:

ZETTLER P/N:AH105016

Customer p/n:


DATE:2012-7-31

VER.:A0

PAGE No.:page 2 of 3

1.OUTLINE DRAWING(外形图):

UNIT(单位): mm

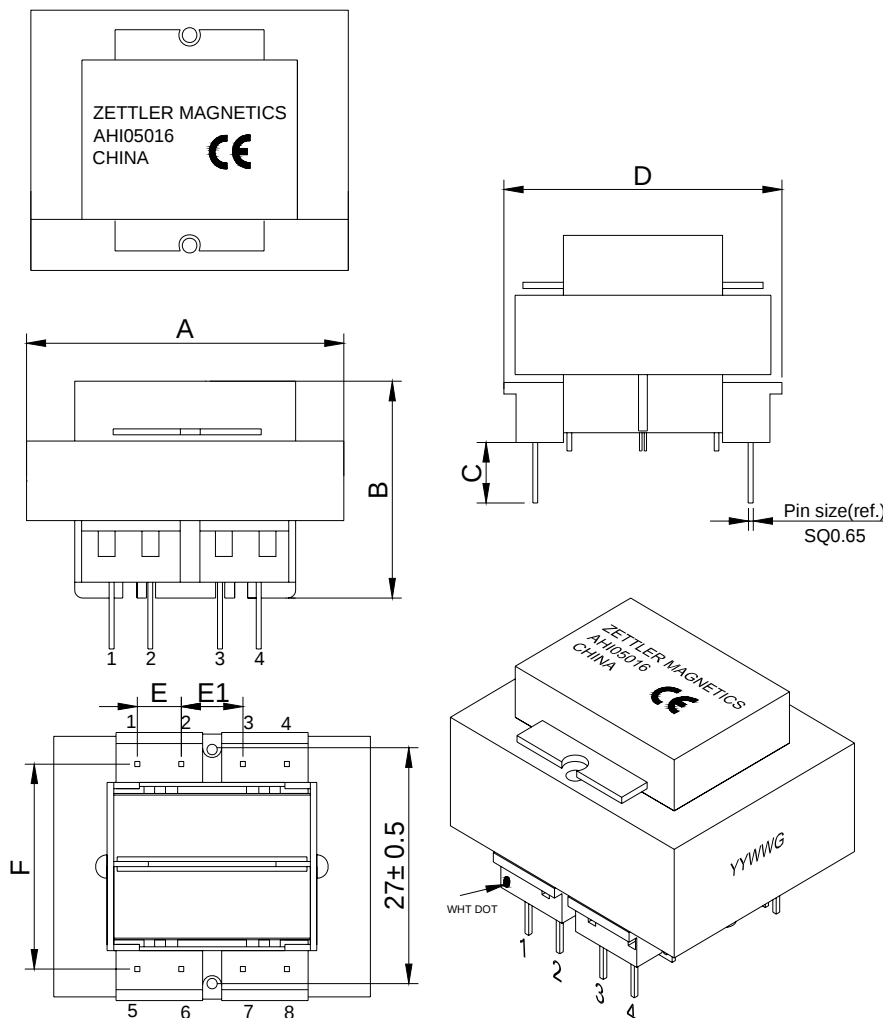

A: 41.5 Max

B: 36.0 Max

C: 4.76 Min

D: 37.0 Max


E: 5.1±0.5

E1: 10.15±0.5


F: 25.4±0.5

Pin size(ref.):SQ0.65

2.SCHEMATIC(原理图):

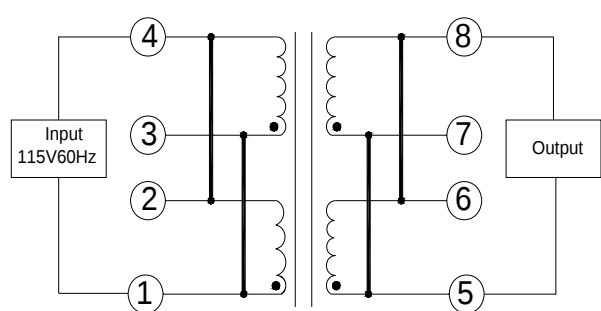

Parallel Circuit

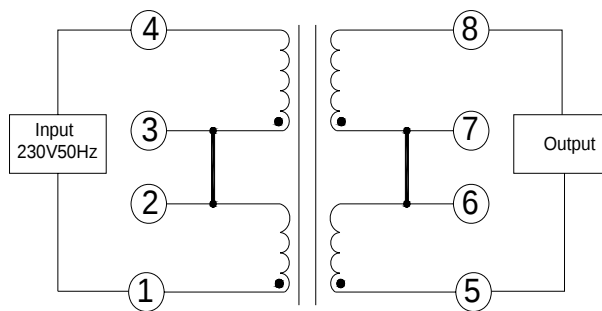

Series Circuit

3.ELECTRICAL SPECIFICATION(电气特性测试):

ITEM 项目	RESISTANCE 电阻 (Ω)		EXCITATION CURRENT 空载电流 (mA)	OUTPUT VOLTAGE 输出电压 (VAC)				INSULATION RESISTANCE 绝缘阻抗	HI-POT VOLTAGE 耐压
CONDITION 测试条件	(25° C)		INPUT:115V 60Hz	PAR. Input:115V 60Hz		SER. Input:230V 50Hz		DC 500V/1min	1mA/1min
TERMINAL 端子	1--2	5--6	1, 3--2, 4	PAR. OUTPUT VOLTAGE		SER. OUTPUT VOLTAGE		P--P P--S P, S--C S--S	P--S P, S--C
	3--4	7--8		0mA	0.6A	0mA	0.3A		
STANDARD 要求	538 ± 15%	2.92 ± 15%	45 Max	10.3 ± 5%	8.0 ± 5%	20.5 ± 5%	16.0 ± 5%	100MΩ MIN	4.0KV

测试报告 / TEST REPORT (QC)

CUSTOMER: ZETTLER P/N:AH105016 Customer p/n: DATE:2012-7-31 VER.:A0 PAGE No.:page 3 of 3

1.DIMENSION TEST(尺寸)

DIMENTION 尺寸	A	B	C	D	E	E1	F	Pin size(ref.)
STANDARD 要求	41.5 Max	36.0 Max	4.76 min	37.0 Max	5.1±0.5	10.15±0.5	25.4±0.5	SQ0.65
1								
2								
3								
4								
5								
JUDGE 判定								

2.ELECTRICAL SPECIFICATION TEST(电性能)

ITEM 项目	RESISTANCE 电阻(Ω)		EXCITATION CURRENT 空载电流(mA)	OUTPUT VOLTAGE 输出电压(VAC)				INSULATION RESISTANCE 绝缘阻抗	HI-POT VOLTAGE 耐压
CONDITION 测试条件	(25° C)		INPUT:115V 60Hz	PAR. Input:115V 60Hz		SER. Input:230V 50Hz		DC 500V/1min	1mA/1min
TERMINAL 端子	1--2	5--6	1, 3--2, 4	PAR. OUTPUT VOLTAGE		SER. OUTPUT VOLTAGE		P--P P--S P, S--C S--S	P--S P, S--C
	3--4	7--8		0mA	0.6A	0mA	0.3A		
STANDARD 要求	538±15%	2.92±15%	45 Max	10.3±5%	8.0±5%	20.5±5%	16.0±5%	100MΩ MIN	4.0KV
1									
2									
3									
4									
5									
JUDGE 判定									

TESTED BY

CHECKED BY

APPROVED BY