


NON-INSULATED

RING TERMINALS
无绝缘圆形端子

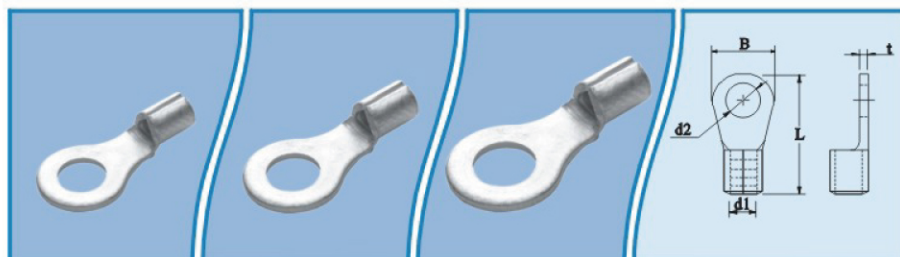

ITEM NO 品名	DIMENSIONS 尺寸 inch(mm)					STANDARD PACKING 包装方式 (PIECE)		STUD SIZE	WIRE RANGE 电线范围 A.W.G. mm²
BRAZED SEAM 焊 接	d1	d2	B	L	t	BOX 盒子	CARTON 纸 箱		
R0.5-2B	0.043 (1.1)	0.087(2.2)	0.205(5.2)	0.488(12.4)	0.020 (0.5)	10,000	60,000	#2	22-20 A.W.G. 0.2-0.5 mm²
R0.5-3B		0.126(3.2)				10,000	60,000	#4	
R0.5-3.5B		0.146(3.7)	0.260(6.6)	0.591(15.0)		10,000	60,000	#6	
R0.5-4B		0.169(4.3)				10,000	60,000	#8	
R0.5-5B		0.209(5.3)				0.315(8.0)	10,000	60,000	
R1.25-3B	0.074 (1.9)	0.126(3.2)	0.217(5.5)	0.453(11.5)	0.029 (0.7)	2,000	30,000	#4	22-16 A.W.G. 0.5-1.5 mm²
R1.25-3.5B		0.146(3.7)	0.217(5.5)	0.453(11.5)		2,000	30,000	#6	
R1.25-3.5LB		0.146(3.7)	0.260(6.6)	0.567(14.4)		2,000	30,000	#6	
R1.25-4B		0.169(4.3)	0.315(8.0)	0.622(15.8)		2,000	30,000	#8	
R1.25-4MB		0.169(4.3)	0.260(6.6)	0.567(14.4)		2,000	30,000	#8	
R1.25-5B		0.209(5.3)	0.315(8.0)	0.622(15.8)		2,000	30,000	#10	
R1.25-6B		0.252(6.4)	0.457(11.6)	0.846(21.5)		1,000	10,000	1/4	
R1.25-8B		0.331(8.4)	0.457(11.6)	0.846(21.5)		1,000	10,000	5/16	
R1.25-10B		0.413(10.5)	0.539(13.7)	1.004(25.5)		1,000	10,000	3/8	
R1.25-12B		0.512(13.0)	0.748(19.0)	1.130(28.7)		1,000	10,000	1/2	
R2-3MB	0.098 (2.5)	0.126(3.2)	0.260(6.6)	0.567(14.4)	0.031 (0.8)	1,000	15,000	#4	16-14 A.W.G. 1.5-2.5 mm²
R2-3B		0.126(3.2)	0.335(8.5)	0.661(16.8)		1,000	15,000	#4	
R2-3.5B		0.146(3.7)	0.260(6.6)	0.567(14.4)		1,000	15,000	#6	
R2-3.5LB		0.146(3.7)	0.335(8.5)	0.661(16.8)		1,000	15,000	#6	
R2-4B		0.169(4.3)	0.335(8.5)	0.661(16.8)		1,000	15,000	#8	
R2-4MB		0.169(4.3)	0.260(6.6)	0.567(14.4)		1,000	15,000	#8	
R2-5MB		0.209(5.3)	0.335(8.5)	0.661(16.8)		1,000	15,000	#10	
R2-5B		0.209(5.3)	0.374(9.5)	0.657(16.7)		1,000	15,000	#10	
R2-6B		0.252(6.4)	0.472(12.0)	0.835(21.2)		1,000	10,000	1/4	
R2-8B		0.331(8.4)	0.472(12.0)	0.835(21.2)		1,000	10,000	5/16	
R2-10B		0.413(10.5)	0.539(13.7)	1.004(25.5)		1,000	10,000	3/8	
R2-12B		0.512(13.0)	0.748(19.0)	1.130(28.7)		1,000	10,000	1/2	
R3.5-4B	0.133 (3.4)	0.169(4.3)	0.374(9.5)	0.768(19.5)	0.031 (0.8)	500	7500	#8	14-12 A.W.G. 2.5-4 mm²
R3.5-4MB		0.169(4.3)	0.311(7.9)	0.744(18.9)		500	7500	#8	
R3.5-5B		0.209(5.3)	0.374(9.5)	0.768(19.5)		500	7500	#10	
R3.5-5MB		0.209(5.3)	0.311(7.9)	0.744(18.9)		500	7500	#10	
R3.5-6B		0.256(6.5)	0.469(11.9)	0.846(21.5)		500	7500	1/4	
R5.5-3B	0.141 (3.6)	0.126(3.2)	0.374(9.5)	0.768(19.5)	0.039 (1.0)	500	7500	#4	12-10 A.W.G. 4-6 mm²
R5.5-3.5B		0.146(3.7)	0.374(9.5)	0.768(19.5)		500	7500	#6	
R5.5-4SB		0.169(4.3)	0.291(7.4)	0.728(18.5)		500	7500	#8	
R5.5-4B		0.169(4.3)	0.374(9.5)	0.768(19.5)		500	7500	#8	

[Return to the index page](#)