

Ø250 外转子轴流风机 Axial Fans




使用说明:

工作方式: S1
绝缘等级: B级 F级
环境温度: -30℃~60℃

应用范围:

2D-250 380V/50Hz 0-90Pa (20Pa-850m³/h)
2E-250 220V/50Hz 0-90Pa (20Pa-830m³/h)
2E-250 120V/60Hz 0-60Pa (20Pa-850m³/h)
4D-250 380V/50Hz 0-60Pa (20Pa-540m³/h)
4E-250 220V/50Hz 0-60Pa (20Pa-520m³/h)
4E-250 120V/60Hz 0-60Pa (20Pa-600m³/h)

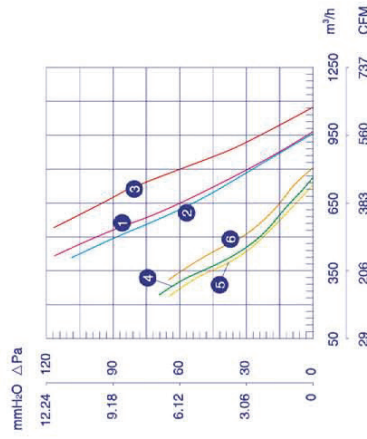

	额定电压 VOLTAGE V	频率 FREQUENCY Hz	额定电流 CURRENT A	输入功率 INPUT W	额定转速 SPEED r/min	风量 AIR VOLUME m³/h	电容 CAPACITANCE μF	噪音 NOISE dBA	净重 NET WEIGHT kg	认证 LICENSE	NO. ON THE CURVE
YWF-2D-250-S-92/25-G	380	50	0.22	80	2500	970	/	60	2.5	CCC, CE	1
YWF-2E-250-S-92/25-G	220	50	0.40	80	2400	960	3	60	2.5	CCC, CE	2
YWF-4D-250-S-92/25-G	120	60	0.95	120	2850	1070	10	60	2.5	CCC, CE	3
YWF-4E-250-S-92/25-T	380	50	0.17	60	1400	770	/	55	2.5	CCC, CE	4
YWF-4E-250-S-92/25-T	220	50	0.23	50	1380	730	2	55	2.5	CCC, CE	5
YWF-4E-250-S-92/25-R	120	60	0.55	65	1600	800	8	55	2.5	CCC, CE	6

